


105 °C Low profile, Snap-in Terminal Type

**FEATURES**

- Load Life:105°C 3000 hours, with 20mm height.
- Smaller size with higher ripple current endurance than PMC series.



SNAP-IN/LUG



**SPECIFICATIONS**

Items	Characteristics																									
Category Temperature Range	-40~+105°C	-25~+105°C																								
Rated Voltage Range	10~100V.DC	160~450V.DC																								
Capacitance Tolerance	±20%(20°C,120Hz)																									
Leakage Current(MAX)	$I=3\sqrt{CV}$ (After 5 minutes application of rated voltage) I=Leakage Current(μA) V=Rated Voltage(V) C=Rated Capacitance(μF)																									
Dissipation Factor(MAX)	<table border="1"> <thead> <tr> <th>Rated Voltage(V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> <th>160~400</th> <th>420~450</th> <th>(20°C,120Hz)</th> </tr> </thead> <tbody> <tr> <td>tanδ</td> <td>0.55</td> <td>0.50</td> <td>0.45</td> <td>0.40</td> <td>0.35</td> <td>0.30</td> <td>0.25</td> <td>0.20</td> <td>0.55</td> <td>0.20</td> <td></td> </tr> </tbody> </table>		Rated Voltage(V)	10	16	25	35	50	63	80	100	160~400	420~450	(20°C,120Hz)	tanδ	0.55	0.50	0.45	0.40	0.35	0.30	0.25	0.20	0.55	0.20	
Rated Voltage(V)	10	16	25	35	50	63	80	100	160~400	420~450	(20°C,120Hz)															
tanδ	0.55	0.50	0.45	0.40	0.35	0.30	0.25	0.20	0.55	0.20																
Impedance Ratio(MAX)	<table border="1"> <thead> <tr> <th>Rated Voltage(V)</th> <th>10~100</th> <th>160~250</th> <th>315~450</th> <th>(120Hz)</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>3</td> <td>3</td> <td>8</td> <td></td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>12</td> <td>-</td> <td>-</td> <td></td> </tr> </tbody> </table>		Rated Voltage(V)	10~100	160~250	315~450	(120Hz)	Z(-25°C)/Z(20°C)	3	3	8		Z(-40°C)/Z(20°C)	12	-	-										
Rated Voltage(V)	10~100	160~250	315~450	(120Hz)																						
Z(-25°C)/Z(20°C)	3	3	8																							
Z(-40°C)/Z(20°C)	12	-	-																							
Endurance	After applying rated voltage with rated ripple current for 3000hrs at 105°C, the capacitors shall meet the following requirements. <table border="1"> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±20% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </tbody> </table>		Capacitance Change	Within ±20% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.																		
Capacitance Change	Within ±20% of the initial value.																									
Dissipation Factor	Not more than 200% of the specified value.																									
Leakage Current	Not more than the specified value.																									

**MULTIPLIER FOR RIPPLE CURRENT**


Frequency coefficient

Frequency (Hz)		60(50)	120	500	1k	10k≤
Coefficient	10~100WV	0.90	1.00	1.05	1.10	1.15
	160~250WV	0.80	1.00	1.20	1.30	1.50
	315~450WV	0.80	1.00	1.20	1.25	1.40

**Option**

	Code
without plate	OOE
with plate	Blank

**◆ DIMENSIONS**

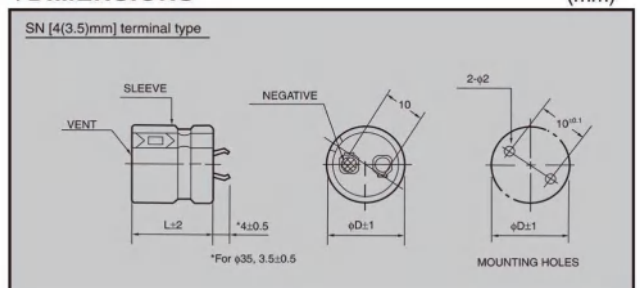

## STANDARD SIZE, RATED RIPPLE CURRENT

Cap(μF) \ WV	10	16	25	35	50	63	80	100
330								20x20 0.60
390								20x20 0.71
470							20x20 0.65	22x20 0.78
560							20x20 0.70	25x20 0.95
680							22x20 0.84	25x20 1.09
820						20x20 0.83	25x20 1.04	30x20 1.32
1000						22x20 0.99	25x20 1.19	
1200					20x20 0.87	22x20 1.10	30x20 1.44	
1500					22x20 1.02	25x20 1.20		
1800				20x20 0.80	22x20 1.15	30x20 1.47		
2200				20x20 0.94	25x20 1.34	30x20 1.52		
2700			20x20 0.98	22x20 1.04	30x20 1.60			
3300		20x20 1.06	22x20 1.08	25x20 1.29				
3900		20x20 1.25	22x20 1.29	30x20 1.45				
4700	20x20 0.98	22x20 1.38	25x20 1.58					
5600	20x20 1.16	25x20 1.68	25x20 1.61					
6800	22x20 1.31	25x20 1.80						
8200	25x20 1.59							
10000	25x20 1.77							

Cap(μF) \ WV	160	160	200	220	250	315	350	385
39								
47								20x20 0.35
56							20x20 0.38	20x20 0.38
68						20x20 0.41	20x20 0.40	22x20 0.42
82						22x20 0.48	22x20 0.45	25x20 0.50
100					20x20 0.59	22x20 0.51	25x20 0.54	25x20 0.52
120			20x20 0.63	20x20 0.60	22x20 0.65	25x20 0.57	25x20 0.57	30x20 0.61
150		20x20 0.66	20x20 0.66	22x20 0.70	25x20 0.74	30x20 0.65	30x20 0.65	30x20 0.64
180	20x20 0.69	22x20 0.80	22x20 0.80	25x20 0.80	25x20 0.77	30x20 0.70	35x20 0.78	35x20 0.80
220	22x20 0.81	25x20 0.90	25x20 0.87	25x20 0.85	30x20 0.95	35x20 0.85	35x20 0.85	
270	25x20 0.98	25x20 0.95	35x20 0.95	30x20 1.02	30x20 1.00	35x20 0.90		
330	25x20 1.02	30x20 1.15	30x20 1.15	30x20 1.12	35x20 1.16			
390	30x20 1.25	30x20 1.20	30x20 1.20	35x20 1.25				
470	30x20 1.30	35x20 1.36	35x20 1.41					
560	35x20 1.46	35x20 1.43						
680	35x20 1.51							

Cap(μF) \ WV	400	420	450
39			20x20 0.26
47		20x20 0.30	22x20 0.30
56	20x20 0.34	20x20 0.34	22x20 0.36
68	22x20 0.39	22x20 0.38	25x20 0.41
82	22x20 0.40	25x20 0.45	30x20 0.43
100	25x20 0.49	25x20 0.48	30x20 0.50
120	30x20 0.55	30x20 0.53	35x20 0.53
150	30x20 0.60	30x20 0.58	35x20 0.61
180	35x20 0.75	35x20 0.70	
220	35x20 0.80		

Ripple Current (A r.m.s./120Hz . 105°C)  
Case Size øDxL(mm)